Threadless Combination Coupling




Features

- Malleable iron or ductile cast iron, zinc plated.
- Temperature range: -20°C ~ 105°C



E2101/P2101 Assembly Illustration
EMT/PVC/RSC Conduit + Screw+ Body + Ferrule + Gland Packing + Cap Nut + BLISS Flexible Conduit

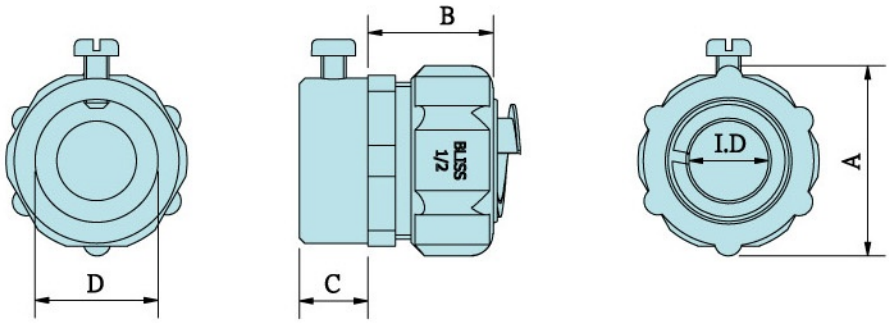



E2101

- For connecting EMT with flexible conduit
- Threadless, furnished with screw
- 2-1/2"~4" same as P2101

Trade Size (inch)	Catalog Number	Dimension (mm)					EMT	Standard Packing (pcs)
		I.D.	A	B	C	D	CNS 2606-C4060 JIS C 8305	
1/2"	**E21010400**	14.5	34.5	22.5	12.5	19.6	E19	50
3/4"	**E21010600**	19.5	41.5	28.0	14.0	25.9	E25	50
1"	**E21011000**	25.0	46.0	31.5	17.5	32.3	E31	25
1-1/4"	**E21011200**	33.5	55.5	34.0	18.0	38.6	E39	25
1-1/2"	**E21011400**	38.5	63.2	36.5	21.5	51.3	E51	20
2"	**E21012000**	49.5	76.0	44.5	24.0	64.0	E63	10



P2101

- For connecting RSC/PVC conduit with flexible conduit
- Threadless, furnished with screw

Trade Size (inch)	Catalog Number	Dimension (mm)					RSC	PVC	Standard Packing (pcs)
		I.D.	A	B	C	D	CNS 2606-C4060 JIS C 8305	CNS 1302-K3006	
1/2"	**P21010400**	14.5	34.5	22.5	12.5	22.4	G16	16	50
3/4"	**P21010600**	19.5	41.5	28.0	14.0	27.2	G22	20	50
1"	**P21011000**	25.0	46.0	31.5	17.5	34.5	G28	28	25
1-1/4"	**P21011200**	33.5	55.5	34.0	18.0	42.6	G36	35	25
1-1/2"	**P21011400**	38.5	63.2	36.5	21.5	48.6	G42	41	20
2"	**P21012000**	49.5	76.0	44.5	24.0	60.8	G54	52	10
2-1/2"	**P21012400**	60.0	99.2	58.5	33.5	76.8	G70	65	1
3"	**P21013000**	75.0	118.3	60.5	35.0	90.0	G82	80	1
4"	**P21014000**	97.0	145.3	58.0	38.0	115.0	G104	100	1