
Cable Gland

- Malleable iron, ductile cast iron or steel, zinc plated
- Furnished with O-ring and insulating liner
- NPT thread
- Metric thread, PG thread and PF thread (die cast zinc) available by request.
- For fixing power cable.
- Temperature range: -20°C ~ 105°C






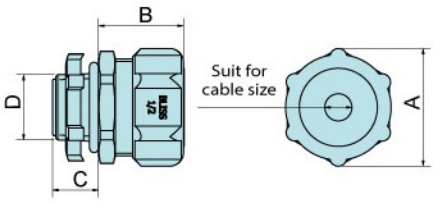

B7131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**B71310304**	29.0	22.5	14.5	21.0	4 - 8	100
NPT 1/2	3/8"	**B71310308**	29.0	22.5	14.5	21.0	8 - 12	100
NPT 1/2	3/8"	**B71310312**	29.0	22.5	14.5	21.0	12 - 13	100
NPT 3/4	3/4"	**B71310614**	41.5	28.0	16.0	26.4	14 - 18	50
NPT 1	1"	**B71311018**	46.0	31.5	19.5	33.3	18 - 24	50
NPT 1-1/4	1-1/4"	**B71311224**	55.5	34.0	20.5	41.9	24 - 32	25

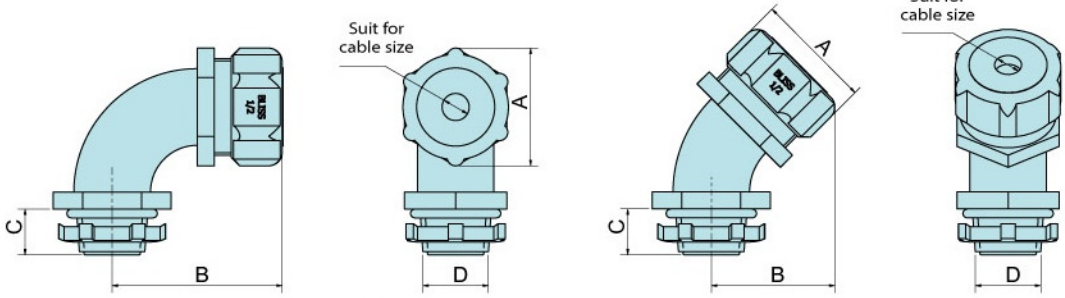

L7131 N7131



L7131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**L71310304**	29.0	40.0	14.5	21.0	4 - 8	50
NPT 1/2	3/8"	**L71310308**	29.0	40.0	14.5	21.0	8 - 12	50
NPT 1/2	3/8"	**L71310312**	29.0	40.0	14.5	21.0	12 - 13	50
NPT 3/4	3/4	**L71310614**	41.5	53.0	16.0	26.4	14 - 18	25
NPT 1	1"	**L71311018**	46.0	59.0	19.5	33.3	18 - 24	25
NPT 1-1/4	1-1/4"	**L71311224**	55.5	69.0	20.5	41.9	24 - 32	15



N7131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**N71310304**	29.0	31.0	14.5	21.0	4 - 8	50
NPT 1/2	3/8"	**N71310308**	29.0	31.0	14.5	21.0	8 - 12	50
NPT 1/2	3/8"	**N71310312**	29.0	31.0	14.5	21.0	12 - 13	50
NPT 3/4	3/4"	**N71310614**	41.5	37.0	16.0	26.4	14 - 18	25
NPT 1	1"	**N71311018**	46.0	46.5	19.5	33.3	18 - 24	25
NPT 1-1/4	1-1/4"	**N71311224**	55.5	53.0	20.5	41.9	24 - 32	15